


### Graphic reference



### Dimensions

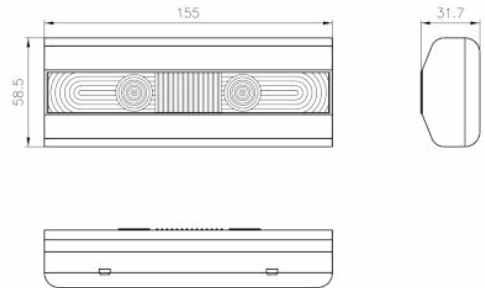

**Control System:** AutoTest  
Centralized Wireless  
**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Luminaire:** Self-Contained  
**Certification:** CE

### Electrical characteristics

**Supply:** 230V 50Hz<2.5W  
**Maintained mode consumption:** 2.5 W  
**Non-maintained mode consumption:** 0.9 W  
**Working temperature:** 0-40°C  
**Emergency lamp:** 6xLED 0.5W  
**Emergency lumen output:** 170 lm  
**Maintained lumen output:** 100 lm  
**Battery:** 3.2V-1.5Ah LFP

**Class:** II  
**Mode:** M/NM  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 3 h  
**Remote control:** No  
**Charging time:** 12 h


### Mechanical characteristics

**Envelope:** Polycarbonate  
**Diffuser:** Ambient + Directional Lens  
**Suitable for flammable surfaces:** Yes

**ATEX Envelope:**

**IP/IK:** IP42/IK04  
**Finish:** White RAL9003  
**Weight:** 0,50KG

### Photometric curve

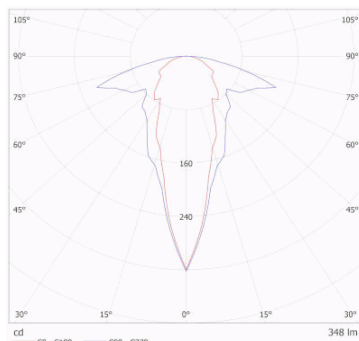

### Interdistance

**Installation height**

|       |        |         |
|-------|--------|---------|
| 2,0 m | 7,53 m | 11,82 m |
| 2,5 m | 8,20 m | 12,64 m |
| 3,0 m | 8,36 m | 12,35 m |
| 3,5 m | 8,33 m | 12,23 m |

### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Luminaires have a selector bridge to enable / disable the maintained mode.  
Installation with mounting plate.  
Possibility of installation in:  
    Ceiling/Wall surface.  
    Recessed ceiling (with installation accessory)  
Possibility of connection with:  
    Recessed wiring.


### Operating characteristics

The luminaire has status LEDs, which indicates:  
    Status of the battery charging circuit.  
    Battery status (duration)  
    Emergency status function.  
    Test status.  
Microprocessor controlled luminaire  
The luminaire can be connected to a control unit.  
When the luminaire is installed without a control unit, it performs periodic and automatic tests.  
    Functional test every 7 days.  
    Duration test every 365 days.  
The test result is shown in the status indicator LEDs.  
Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

### General Envelope data

### Accessories

#### AMY0011



ACC. REC. ALYA WHITE CEILING