


Graphic reference

Dimensions

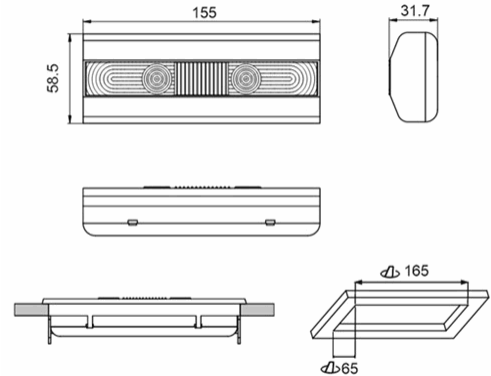

Control System: AutoTest

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<2.2W

Maintained mode consumption: - W

Non-maintained mode consumption: 2,2 W

Working temperature: 0-40°C

Emergency lamp: 6xLED 0.5W

Emergency lumen output: 225 lm

Maintained lumen output: - lm

Battery: 3.6V-0.8Ah Ni-Cd

Class: II

Mode: Non-maintained

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: No

Charging time: 24 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Ambient + Directional Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,17KG

Photometric curve

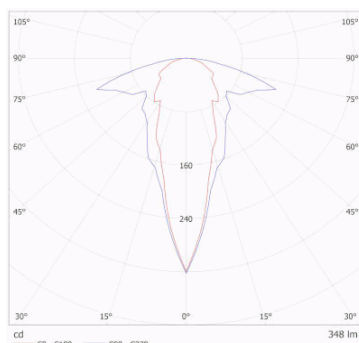

Interdistance

Installation height

2,0 m	7,58 m	11,87 m
2,5 m	9,02 m	14,14 m
3,0 m	9,49 m	14,49 m
3,5 m	9,63 m	14,21 m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).
Luminaires have a selector bridge to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
 Recessed ceiling (with installation accessory)
Possibility of connection with:
 Recessed wiring.

Operating characteristics

The luminaire has status LEDs, which indicates:
 Status of the battery charging circuit.
 Battery status (duration)
 Emergency status function.
 Test status.
Microprocessor controlled luminaire that performs periodic and automatic tests.
 Functional test every 7 days.
 Duration test every 365 days.
The test result is shown in the status indicator LEDs.

General Envelope data

Accessories

AMY0011



ACC. REC. ALYA WHITE

AYE0065

ACC. ENVOL. IP65 ALYA WHITE

AMK0001

ACC. TRACK ALYA M/NM IP20 WHITE
NOT SUITABLE FOR DALI