


### Graphic reference



### Dimensions

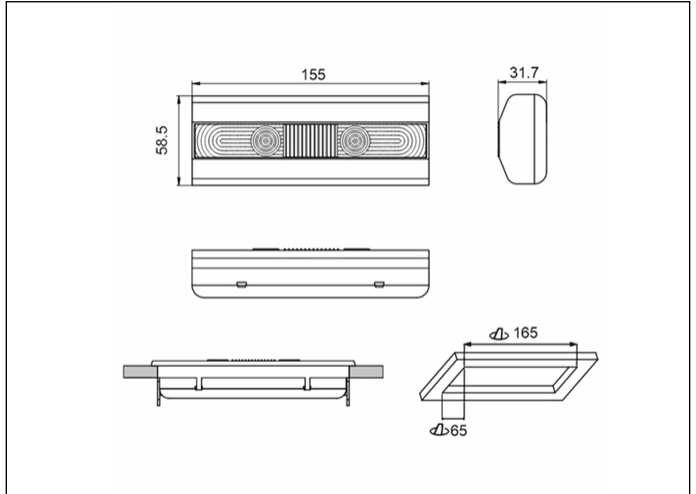

**Control System:** DALI2

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034, EN  
61347-2-7, EN 61347-2-13, EN  
62386

**Certification:** CE, ENEC,  
CIVIL DEFENSE, DALI2



### Electrical characteristics

**Supply:** 230V 50Hz<2.8W

**Maintained mode consumption:** 2,8 W

**Non-maintained mode consumption:** 1,0 W

**Working temperature:** 0-40°C

**Emergency lamp:** 6xLED 0.5W

**Emergency lumen output:** 300 lm

**Maintained lumen output:** 180 lm

**Battery:** 3.2V-3.0Ah LFP

**Class:** II

**Mode:** -

**Power factor:** - %

**Signaling Luminaire:** -

**LED temperature:** 4000°K

**Duration:** 3 h

**Remote control:** No

**Charging time:** 12 h

### Mechanical characteristics

**Housing:** Polycarbonate

**Diffuser:** Ambient + Directional Lens

**Suitable for flammable surfaces:** Yes


**ATEX Envelope:**

**IP/IK:** IP42/IK04

**Finish:** White RAL9003

**Weight:** 0,22KG

### Photometric curve

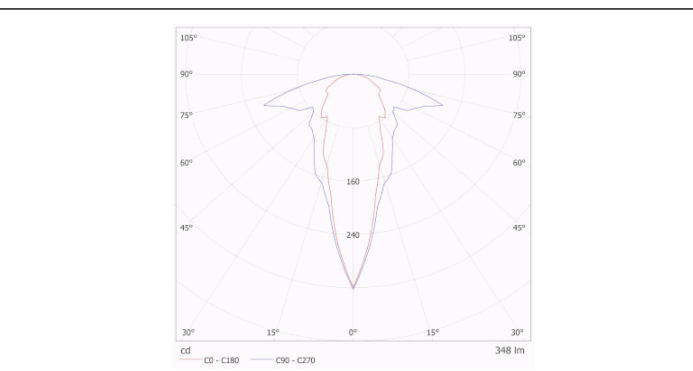

### Interdistance

**Installation height**



2,0 m                      7,58 m                      11,87 m

2,5 m                      9,48 m                      14,84 m

3,0 m                      10,60 m                      16,47 m

3,5 m                      10,98 m                      16,71 m

### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Luminaires have a selector bridge to enable / disable the maintained mode.  
Installation with mounting plate.  
Possibility of installation in:  
    Ceiling/Wall surface.  
    Recessed ceiling (with installation accessory)  
Possibility of connection with:  
    Recessed wiring.

### Operating characteristics

Bus available for DALI2 communication.  
The luminaire has a status LED, which indicates:  
    Green LED: OK  
    Yellow LED flashing: Battery charging or battery connection failure.  
    LED off: Emergency operation failure or mains failure or defective LED or defective unit.

### General Envelope data

### Accessories

#### AMY0011



ACC. REC. ALYA WHITE CEILING

#### AYE0065

ACC. ENVOL. IP65 ALYA WHITE