


Graphic reference



Dimensions

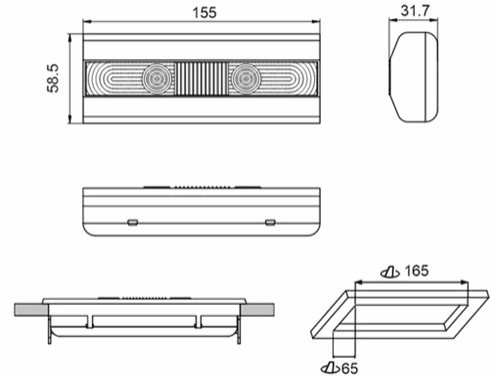

Control System: AutoTest
Centralized Wireless

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<3.8W
Maintained mode consumption: 3.8 W
Non-maintained mode consumption: 0.9 W
Working temperature: 0-40°C
Emergency lamp: 6xLED 0.5W
Emergency lumen output: 390 lm
Maintained lumen output: 235 lm
Battery: 3.2V-1.5Ah LFP

Class: II
Mode: -
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 1 h
Remote control: No
Charging time: 12 h

Mechanical characteristics


Envelope: Polycarbonate
Diffuser: Ambient + Directional Lens
Suitable for flammable surfaces: Yes

IP/IK: IP42/IK04
Finish: White RAL9003

Weight: 0,60KG

ATEX Envelope:

Photometric curve

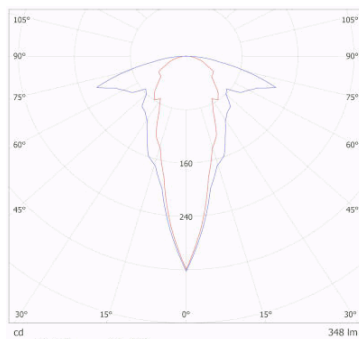

Interdistance

Installation height



2,0 m	7,58 m	11,87 m
2,5 m	9,48 m	14,84 m
3,0 m	11,36 m	17,81 m
3,5 m	12,20 m	18,88 m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).
Luminaires have a selector bridge to enable / disable the maintained mode.
Installation with mounting plate.
Possibility of installation in:
 Ceiling/Wall surface.
 Recessed ceiling (with installation accessory)
Possibility of connection with:
 Recessed wiring.

Operating characteristics

The luminaire has status LEDs, which indicates:
 Status of the battery charging circuit.
 Battery status (duration)
 Emergency status function.
 Test status.
Microprocessor controlled luminaire
The luminaire can be connected to a control unit.
When the luminaire is installed without a control unit, it performs periodic and automatic tests.
 Functional test every 7 days.
 Duration test every 365 days.
The test result is shown in the status indicator LEDs.
Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data

Accessories

AMY0011



ACC. REC. ALYA WHITE CEILING