


Graphic reference



Dimensions

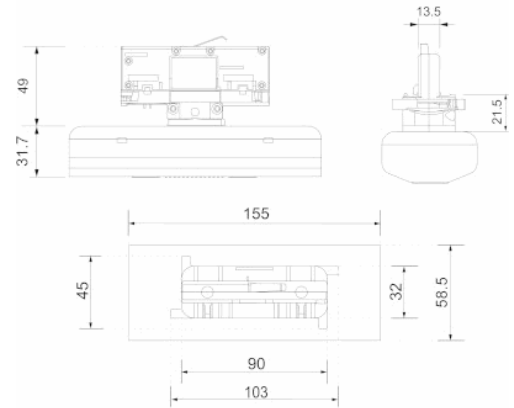

Control System: AutoTest
Centralized Wireless

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE

Electrical characteristics

Supply: 230V 50Hz<2.8W

Maintained mode consumption: 2.8 W

Non-maintained mode consumption: - W

Working temperature: 0-40°C

Emergency lamp: 6xLED 0.5W

Emergency lumen output: 300 lm

Maintained lumen output: 180 lm

Battery: 3.2V-3.0Ah LFP

Class: II

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 3 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Ambient + Directional Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP20/IK04

Finish: White RAL9003

Weight: 0,43KG

Photometric curve

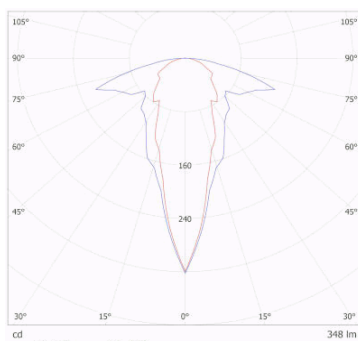

Interdistance

Installation height



2,0 m	7,58 m	11,87 m
2,5 m	9,48 m	14,84 m
3,0 m	10,60 m	16,47 m
3,5 m	10,98 m	16,71 m

Installation characteristics

Installation possibilities in:

Electrical rail.

Compatible with ONETRACK UL 3 circuits

Compatible with EUROSTANDARD tracks

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data