


Graphic reference



Dimensions

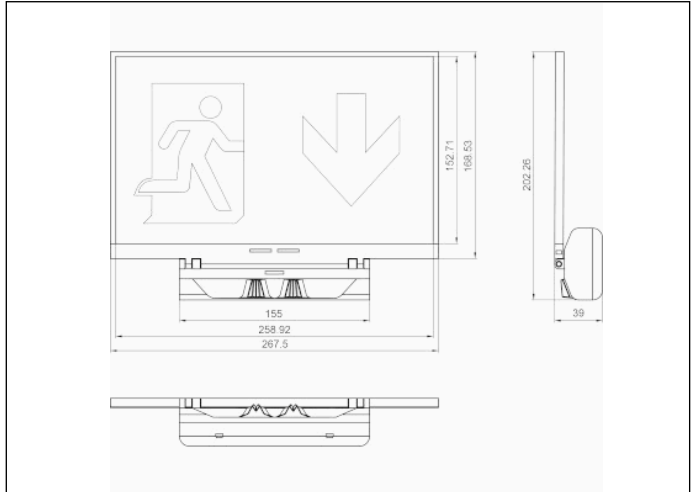

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034, EN
61347-2-7, EN 61347-2-13, EN
62386

Certification: CE, ENEC



Electrical characteristics

Supply: 230V 50Hz<3.3W

Maintained mode consumption: 3.3 W

Non-maintained mode consumption: 2.5 W

Working temperature: 0-40°C

Emergency lamp: 25xLED 0.5W

Emergency lumen output: 120 lm

Maintained lumen output: 70 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 4000°K

Duration: 1 h

Remote control: Yes

Charging time: 12 h

Mechanical characteristics

Envelope: Polycarbonate

Diffuser: Antipanic Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: Black RAL9005

Weight: 0,16KG

Photometric curve

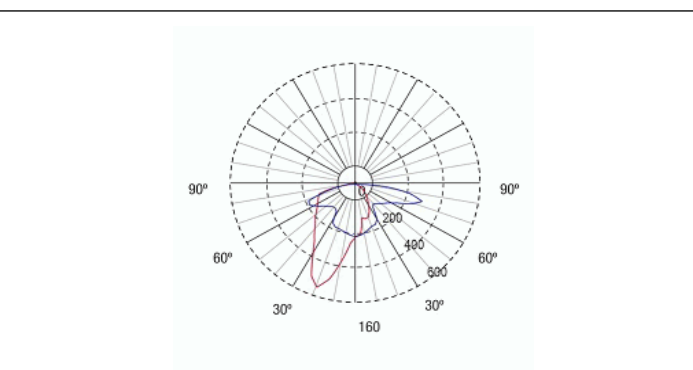

Interdistance

Installation height



2,0 m

8,12 m

5,92 m

2,5 m

7,75 m

6,33 m

3,0 m

7,10 m

6,58 m

3,5 m

6,32 m

6,73 m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).
Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).
Installation with mounting plate.
Possibility of installation in:
 Wall surface.
Possibility of connection with:
 Surface tube wiring.
Vision distance: 25 m

Operating characteristics

Bus available for DALI communication.
The luminaire has a status LED, which indicates:
 Green LED: OK
 Yellow LED flashing: Battery charging or battery connection failure.
 LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data