


### Graphic reference



### Dimensions

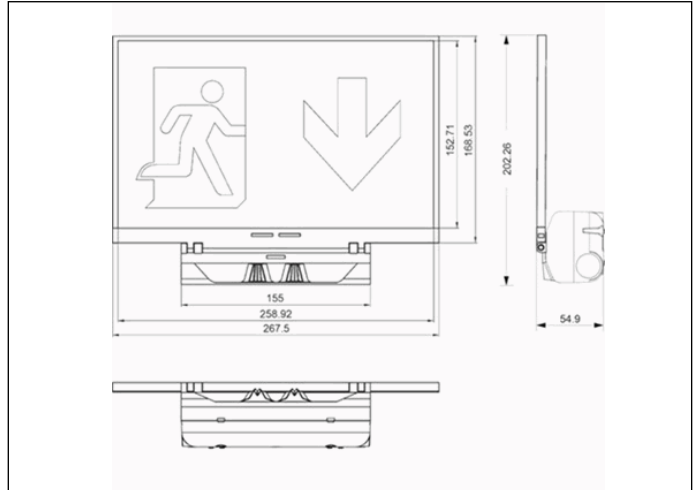

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,  
 EN-60598-2-22, EN 61347-2-7,  
 EN 61347-2-13, EN 62386

Certification: CE



### Electrical characteristics

Supply: 230V 50Hz<3.3W

Maintained mode consumption: 3,3 W

Non-maintained mode consumption: 2,5 W

Working temperature: 0-40°C

Emergency lamp: 25xLED 0.5W

Emergency lumen output: 120 lm

Maintained lumen output: 70 lm

Battery: 3.2V-3.0Ah LFP

Class: II

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 6500°K

Duration: 3 h

Remote control: Yes

Charging time: 12 h

### Mechanical characteristics

Housing: Polycarbonate

Diffuser: Antipanic Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,45KG

### Photometric curve

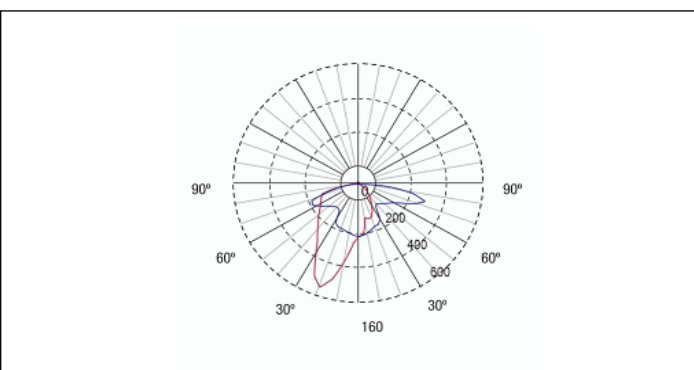

### Interdistance

Installation height



2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m

#### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).  
Installation with mounting plate.  
Possibility of installation in:  
    Wall surface.  
Possibility of connection with:  
    Surface tube wiring.  
Vision distance: 25 m

#### Operating characteristics

Bus available for DALI communication.  
The luminaire has a status LED, which indicates:  
    Green LED: OK  
    Yellow LED flashing: Battery charging or battery connection failure.  
    LED off: Emergency operation failure or mains failure or defective LED or defective unit.

#### General Envelope data