


Graphic reference



Dimensions

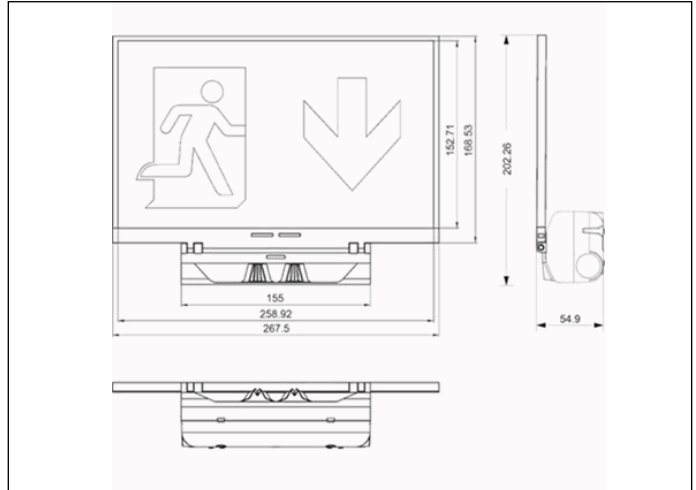

Control System: SmartZ

Luminaire: Self-Contained

Standards: EN-60598-1,
 EN-60598-2-22, EN-62034,
 ETSI EN 303 446-1 V1.2.1

Certification: CE



Electrical characteristics

Supply: 230V 50Hz<3.3W

Maintained mode consumption: 3,3 W

Non-maintained mode consumption: 2,5 W

Working temperature: 0-40°C

Emergency lamp: 25xLED 0.5W

Emergency lumen output: 120 lm

Maintained lumen output: 70 lm

Battery: 3.2V-1.5Ah LFP

Class: II

Mode: -

Power factor: - %

Signaling Luminaire: -

LED temperature: 6500°K

Duration: 3 h

Remote control: No

Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate

Diffuser: Antipanic Lens

Suitable for flammable surfaces: Yes


ATEX Envelope:

IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,45KG

Photometric curve

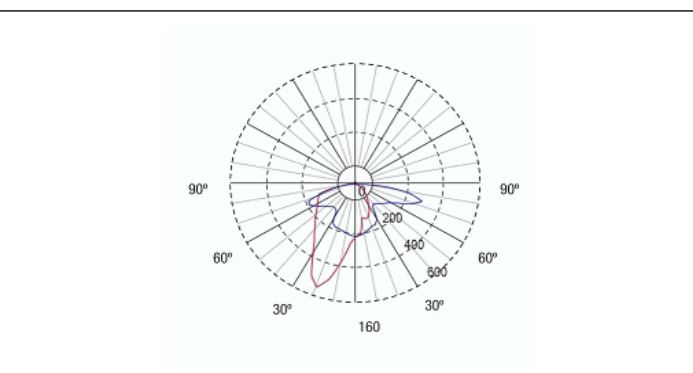

Interdistance

Installation height



2,0 m	8,12 m	5,92 m
2,5 m	7,75 m	6,33 m
3,0 m	7,10 m	6,58 m
3,5 m	6,32 m	6,73 m

Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).
Luminaires have a selector bridge to enable / disable the maintained mode. (lens lighting).
Installation with mounting plate.
Possibility of installation in:
 Wall surface.
Possibility of connection with:
 Surface tube wiring.
Vision distance: 25 m

Operating characteristics

The luminaire has status LEDs, which indicates:
 Status of the battery charging circuit.
 Battery status (duration)
 Emergency status function.
 Test status.

Microprocessor controlled luminaire
The luminaire can be connected to a control unit.
When the luminaire is installed without a control unit, it performs periodic and automatic tests.
 Functional test every 7 days.
 Duration test every 365 days.

The test result is shown in the status indicator LEDs.
Wireless communication that allows: Communication with Control unit by wireless communication with a 2.4Ghz frequency system.

General Envelope data