


Graphic reference

Dimensions

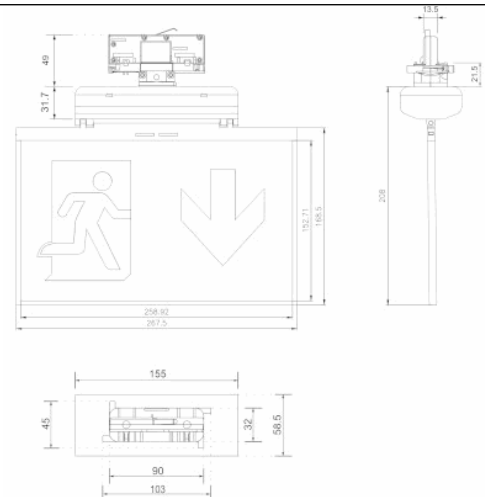

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Certification: CE



Electrical characteristics

Supply: 230V 50Hz<3.6W
Maintained mode consumption: 3,6 W
Non-maintained mode consumption: - W
Working temperature: 0-40°C
Emergency lamp: 25xLED 0.5W
Emergency lumen output: - lm
Maintained lumen output: - lm
Battery: 3.2V-1.5Ah LFP

Class: II
Mode: Maintained
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 3 h
Remote control: No
Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate
Diffuser: Methacrylate
Suitable for flammable surfaces: Yes

IP/IK: IP20/IK04
Finish: White RAL9003
Weight: 0,55KG


ATEX Envelope:

Photometric curve

Interdistance

**Installation
height**

2,0 m
2,5 m
3,0 m
3,5 m

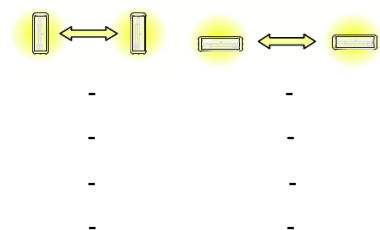

Installation characteristics

Installation possibilities in:

Electrical rail.

Compatible with ONETRACK UL 3 circuits

Compatible with EUROSTANDARD tracks

Operating characteristics

Bus available for DALI communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data

Accessories

EEP406

PICT. EXITALYA WHITE

EEP407

PICT. EXITALYA MAN + UP ARROW

EEP408

PICT. EXITALYA MAN + DOWN
ARROW

EEP409

PICT. EXITALYA MAN + SIDE ARROW