


Graphic reference



Dimensions

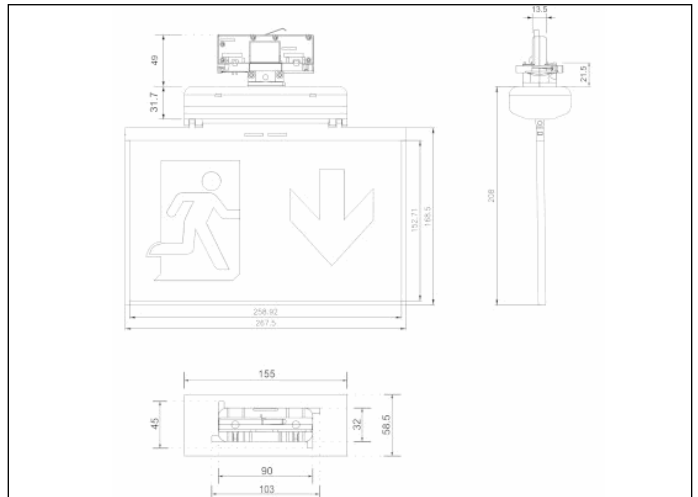

Control System: DALI

Luminaire: Self-Contained

Standards: EN-60598-1,
EN-60598-2-22, EN-62034, EN
61347-2-7, EN 61347-2-13, EN
62386

Certification: CE



Electrical characteristics

Supply: 230V 50Hz<2.9W
 Maintained mode consumption: 2,9 W
 Non-maintained mode consumption: - W
 Working temperature: 0-40°C
 Emergency lamp: 25xLED 0.5W
 Emergency lumen output: - lm
 Maintained lumen output: - lm
 Battery: 3.2V-1.0Ah LFP

Class: II
 Mode: M
 Power factor: - %
 Signaling Luminaire: -
 LED temperature: 4000°K
 Duration: 1 h
 Remote control: Yes
 Charging time: 12 h


Mechanical characteristics

Housing: Polycarbonate
 Diffuser: Methacrylate
 Suitable for flammable surfaces: Yes

IP/IK: IP20/IK04
 Finish: White RAL9003
 Weight: 0,48KG

ATEX Envelope:

Photometric curve



Interdistance

Installation height	Diagram 1	Diagram 2
2,0 m	-	-
2,5 m	-	-
3,0 m	-	-
3,5 m	-	-

Installation characteristics

Installation possibilities in:

Electrical rail.

Compatible with ONETRACK UL 3 circuits

Compatible with EUROSTANDARD tracks

Operating characteristics

Bus available for DALI communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data