


### Graphic reference



### Dimensions

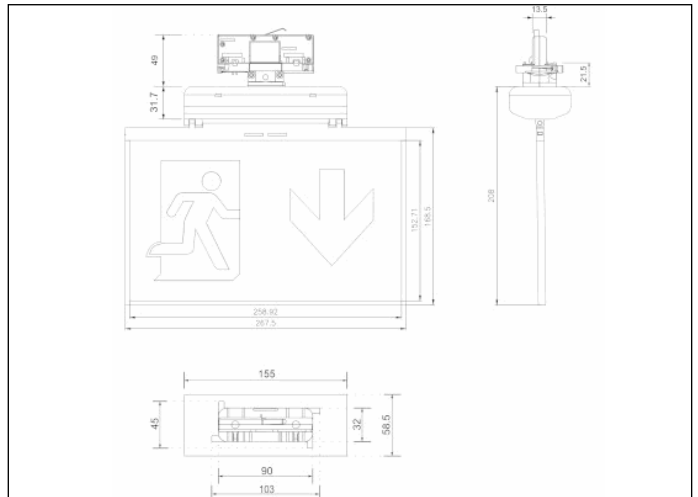

**Control System:** AutoTest  
Centralized Wireless

**Luminaire:** Self-Contained

**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Certification:** CE

### Electrical characteristics

**Supply:** 230V 50Hz<3.6W  
**Maintained mode consumption:** 3.6 W  
**Non-maintained mode consumption:** - W  
**Working temperature:** 0-40°C  
**Emergency lamp:** 25xLED 0.5W  
**Emergency lumen output:** - lm  
**Maintained lumen output:** - lm  
**Battery:** 3.2V-1.5Ah LFP

**Class:** II  
**Mode:** M  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 3 h  
**Remote control:** No  
**Charging time:** 12 h

### Mechanical characteristics

**Envelope:** Polycarbonate  
**Diffuser:** Methacrylate  
**Suitable for flammable surfaces:** Yes

**IP/IK:** IP20/IK04  
**Finish:** White RAL9003

**Weight:** 0,16KG

**ATEX Envelope:**


### Photometric curve



### Interdistance

**Installation  
height**

2,0 m  
2,5 m  
3,0 m  
3,5 m

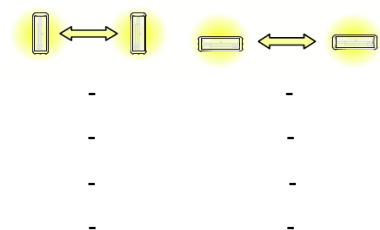

### Installation characteristics

Installation possibilities in:

Electrical rail.

Compatible with ONETRACK UL 3 circuits

Compatible with EUROSTANDARD tracks

### Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire

The luminaire can be connected to a control unit.

When the luminaire is installed without a control unit, it performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

### General Envelope data