


LYE6070LXP3




ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ ze m p e r . c o m
w w w w . z e m p e r . c o m

Graphic reference

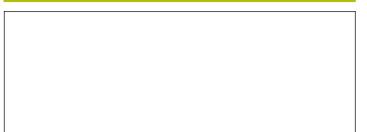

Dimensions



Control System: AutoTest

Luminaire: Self-Contained

Standards: EN-60598-1, EN-60598-2-22, EN-62034

Certification: CE

Flectrical characteristics

Supply: 230V 50Hz<3.6W

 $\label{eq:maintained} \begin{tabular}{ll} \textbf{Maintained mode consumption: } 3,6~W \\ \begin{tabular}{ll} \textbf{Non-maintained mode consumption: } -W \\ \end{tabular}$

Working temperature: 0-40°C Emergency lamp: 25xLED 0.5W Emergency lumen output: - lm Maintained lumen output: - lm Battery: 3.2V-1.5Ah LFP Class: II

Mode: Maintained

Power factor: - %

Signaling Luminaire:
LED temperature: 4000°K

Duration: 3 h **Remote control:** Yes **Charging time:** 12 h

Mechanical characteristics

Housing: Polycarbonate **Diffuser:** Methacrylate

Suitable for flammable surfaces: Yes

IP/IK: IP20/IK04

Finish: White RAL9003

Weight: 0,51KG

ATEX Envelope:

Photometric curve

Interdistance

Installation height		
2,0 m	-	-
2,5 m	-	-
3,0 m	-	-
3,5 m	-	-



LYE6070LXP3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

Installation characteristics

possibilities	

Electrical rail.

Compatible with ONETRACK UL 3 circuits Compatible with EUROSTANDARD tracks

Operating characteristics

The luminaire has status LEDs, which indicates:

Status of the battery charging circuit.

Battery status (duration)

Emergency status function.

Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.

Functional test every 7 days.

Duration test every 365 days.

The test result is shown in the status indicator LEDs.

Remote control input that allows:

Put on Standby without power supply.

Restart in emergency status without power supply.

Switch on in emergency status (more than 24 h of charge)

Manual and remote duration test. (more than 24 hours of charge).

Date and time programming of the tests.

Reset of the luminaire status.

General Envelope data		



PICT. EXITALYA MAN + SIDE ARROW

LYE6070LXP3



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com
www.zemper.com

Accessories

EEP406	EEP407	EEP408
CT. EXITALYA WHITE	PICT. EXITALYA MAN + UP ARROW	PICT. EXITALYA MAN + DOWN ARROW
EEP409		