


### Graphic reference



### Dimensions

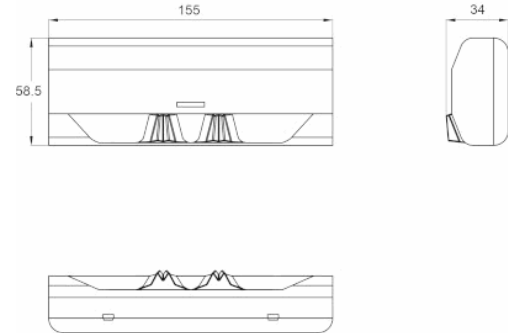

**Control System:** AutoTest  
Centralized Wireless  
**Standards:** EN-60598-1,  
EN-60598-2-22, EN-62034

**Luminaire:** Self-Contained  
**Certification:** CE

### Electrical characteristics

**Supply:** 230V 50Hz<1.0W  
**Maintained mode consumption:** - W  
**Non-maintained mode consumption:** 1.0 W  
**Working temperature:** 0-40°C  
**Emergency lamp:** 4xLED 0.5W  
**Emergency lumen output:** 300 lm  
**Maintained lumen output:** - lm  
**Battery:** 3.2V-1.5Ah LFP

**Class:** II  
**Mode:** NM  
**Power factor:** - %  
**Signaling Luminaire:** -  
**LED temperature:** 4000°K  
**Duration:** 1 h  
**Remote control:** No  
**Charging time:** 12 h


### Mechanical characteristics

**Envelope:** Polycarbonate  
**Diffuser:** Ambient + Directional Lens  
**Suitable for flammable surfaces:** Yes

**ATEX Envelope:**

**IP/IK:** IP42/IK04  
**Finish:** White RAL9003  
**Weight:** 0,16KG

### Photometric curve



### Interdistance

**Installation height**

Installation height	Interdistance	Interdistance
2,0 m	12,27 m	7,97 m
2,5 m	12,80 m	8,65 m
3,0 m	12,85 m	9,22 m
3,5 m	12,70 m	9,68 m

### Installation characteristics

Maintained luminaires use 4 terminals (2xL + 2xN).  
Installation with mounting plate.  
Possibility of installation in:  
    Wall surface.  
Possibility of connection with:  
    Recessed wiring.

### Operating characteristics

The luminaire has status LEDs, which indicates:  
    Status of the battery charging circuit.  
    Battery status (duration)  
    Emergency status function.  
    Test status.

Microprocessor controlled luminaire  
The luminaire can be connected to a control unit.  
When the luminaire is installed without a control unit, it performs periodic and automatic tests.  
    Functional test every 7 days.  
    Duration test every 365 days.

The test result is shown in the status indicator LEDs.  
Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

### General Envelope data