


Graphic reference



Dimensions

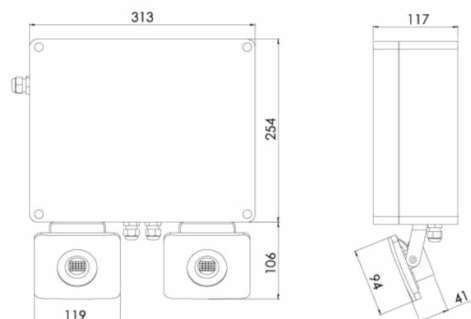

Control System: AutoTest
Centralized Wireless
Standards: EN-60598-1,
EN-60598-2-22, EN-62034

Luminaire: Self-Contained
Certification: CE

Electrical characteristics

Supply: 230V 50Hz<3.0W
Maintained mode consumption: - W
Non-maintained mode consumption: 3.0 W
Working temperature: 0-40°C
Emergency lamp: 2 x LEDS 10W
Emergency lumen output: 1500 lm
Maintained lumen output: - lm
Battery: 12.8V-3.0Ah LFP

Class: II
Mode: NM
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 1 h
Remote control: No
Charging time: 12 h


Mechanical characteristics

Envelope: Polycarbonate
Diffuser: Glass
Suitable for flammable surfaces: Yes

ATEX Envelope:

IP/IK: IP65/IK07
Finish: Gray RAL7035
Weight: 12,30KG

Photometric curve

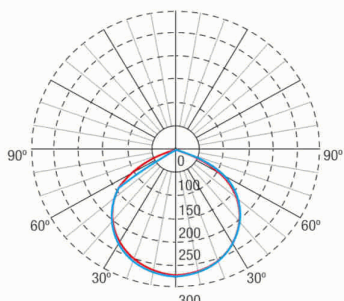

Interdistance

**Installation
height**

2,0 m	9,79 m	8,57 m
2,5 m	12,24 m	10,71 m
3,0 m	14,69 m	12,86 m
3,5 m	17,14 m	15,00 m

Installation characteristics

Possibility of installation in:
Ceiling/Wall surface.
Possibility of connection with:
Surface tube wiring.
It has 3 pre-marked entries for PG-11 (included)
Two orientable spotlights, horizontally y vertically.
Specially designed to cover large areas and / or heights.

Operating characteristics

The luminaire has status LEDs, which indicates:
Status of the battery charging circuit.
Battery status (duration)
Emergency status function.
Test status.
Microprocessor controlled luminaire
The luminaire can be connected to a control unit.
When the luminaire is installed without a control unit, it performs periodic and automatic tests.
Functional test every 7 days.
Duration test every 365 days.
The test result is shown in the status indicator LEDs.
Wireless communication that allows: Communication with Control unit by wireless communication with a 868Mhz frequency system.

General Envelope data