


Graphic reference



Dimensions

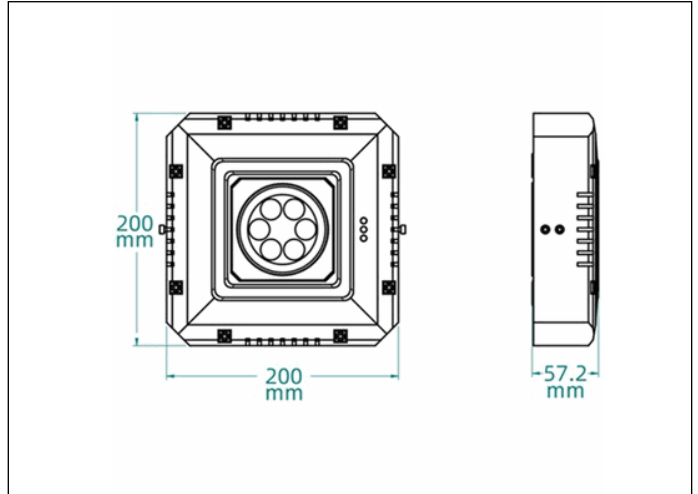

Control System: AutoTest **Luminaire:** Self-Contained
Standards: BS EN 60598-2-22 **Certification:** CE

Electrical characteristics

Supply: 220-240V AC 50Hz<22.0W
Maintained mode consumption: 22 W
Non-maintained mode consumption: 5 W
Working temperature: 0°C<Ta<40°C
Emergency lamp: 6x LEDS 4W
Emergency lumen output: 2200 lm
Maintained lumen output: 2200 lm
Battery: 6,4V-4,0Ah LFP

Class: I
Mode: M/NM
Power factor: - %
Signaling Luminaire: -
LED temperature: 4000°K
Duration: 1 h
Remote control: No
Charging time: 18 h


Mechanical characteristics

Housing: Aluminum
Diffuser: Transparent Polycarbonate
Suitable for flammable surfaces: No

IP/IK: IP65/IK10
Finish: White RAL9003
Weight: 1,80KG

ATEX Envelope:

Photometric curve

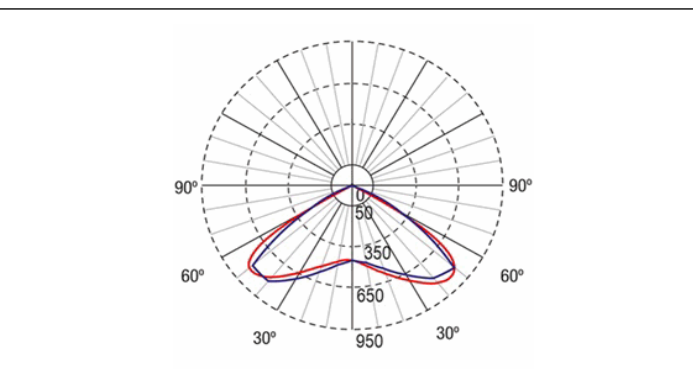

Interdistance

Installation height	Diagram 1	Diagram 2
2,0 m	-	-
2,5 m	-	-
3,0 m	-	-
3,5 m	-	-

Installation characteristics

Possibility of installation in:
Ceiling/Wall surface.

Possibility of connection with:
Surface tube wiring.

One orientable spotlight, vertically.

Supplied with 125° lens and three additional lenses:
-Corridor lens
-45° lens
-80° lens

Operating characteristics

The luminaire has status LEDs, which indicates:
Status of the battery charging circuit.
Battery status (duration)
Emergency status function.
Test status.

Microprocessor controlled luminaire that performs periodic and automatic tests.
Functional test every 7 days.
Duration test every 365 days.

The test result is shown in the status indicator LEDs.

General Envelope data