

LSMX3250LA




ELECTROZEMPER S.A. Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo@zemper.com

Graphic reference

Datasheet SPAZIO ON





Control System: DALI2

Standards: EN-60598-1, EN-60598-2-22, EN-62034, EN 61347-2-7, EN 61347-2-13, EN Certification: CE, DALI2





Supply: 230V 50Hz<0.9W

Maintained mode consumption: - W

Non-maintained mode consumption: 0,9 W

Working temperature: 0-40°C Emergency lamp: 1 x LED 3W Emergency lumen output: 250 lm Maintained lumen output: - Im Battery: 3.2V-1.5Ah LFP

Class: II Mode: NM

62386

Power factor: - % Signaling Luminaire: -LED temperature: 4000°K

Duration: 1 h Remote control: Yes Charging time: 12 h

Mechanical characteristics

Housing: Polycarbonate Diffuser: Antipanic Lens

Suitable for flammable surfaces: Yes


IP/IK: IP42/IK04

Finish: White RAL9003

Weight: 0,19KG

ATEX Envelope:

Photometric curve

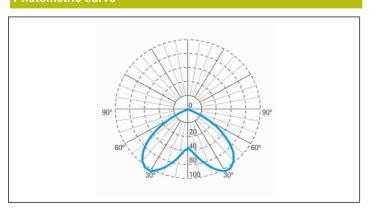

Interdistance

Installation height		
2,0 m	8,00 m	8,00 m
2,5 m	9,21 m	9,21 m
3,0 m	10,27 m	10,27 m
3,5 m	11,26 m	11,26 m



LSMX3250LA



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
info@ zemper.com
www.zemper.com

Installation characteristics

SPAZIO ON

Non-maintained luminaires use 4 terminals (2xL + 2x	IN) IC	or suppiy	connection.
---	--------	-----------	-------------

Maintained luminaires use 5 terminals (2xL + 2xN + L1) to enable / disable the maintained mode.

Installation with mounting plate.

Possibility of installation in:

Ceiling/Wall surface.

Recessed ceiling (with installation accessory)

Possibility of connection with:

Recessed wiring.

Surface tube wiring (max. M20)

perati			

Bus available for DALI2 communication.

The luminaire has a status LED, which indicates:

Green LED: OK

Yellow LED flashing: Battery charging or battery connection failure.

LED off: Emergency operation failure or mains failure or defective LED or defective unit.

General Envelope data	



Datasheet SPAZIO ON

LSMX3250LA



ELECTROZEMPER S.A.
Avda. de la Ciencia s/n.
Parque Ind. Avanzado
13005 Ciudad Real. Spain.
Tel.: +34 902 11 11 97
Fax: +34 902 11 11 97
in fo @ z e m p e r . c o m
w w w w . z e m p e r . c o m

Accessories

CEILING SQUARE

















